(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 13 January 2005 (13.01.2005)

PCT

(10) International Publication Number WO 2005/003834 A1

(51) International Patent Classification7: G11B 7/09

G02B 7/02,

(21) International Application Number:

PCT/GB2004/002781

·28 June 2004 (28.06.2004) (22) International Filing Date:

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 1 July 2003 (01.07.2003) 0315273.3

GB

PCT/GB04/000749 25 February 2004 (25.02.2004) GB

(71) Applicant (for all designated States except US): 1...LIM-ITED [GB/GB]; St John's Innovation Centre, Cowley Road, Cambridge, CB4 0WS (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): TOPLISS, Richard [GB/GB]; 43 Bishops Road, Trumpington, Cambridge CB2 2NQ (GB). LENEL, Ursula, Ruth [GB/GB]; 52 Victoria Park, Cambridge CB4 3EL (GB). HOOLEY,

Anthony [GB/GB]: 79 De Freville Avenue, Cambridge CB4 1HP (GB). SHEPHERD, Mark, Richard [GB/GB]; Clare House, 124 High Street, Meldreth, Royston, Hertfordshire SG8 6BL (GB).


(74) Agents: MERRYWEATHER, Colin, Henry et al.; J.A. Kemp & Co., 14 South Square, Gray's Inn, London WC1R 5JJ (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: CAMERA LENS SUSPENSION

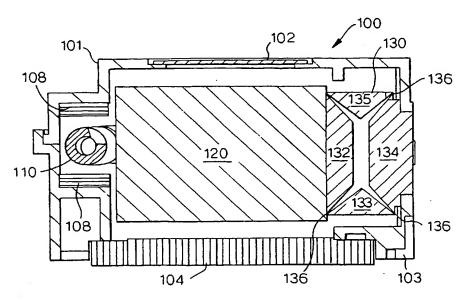

(57) Abstract: A camera comprises: a support structure (100); a lens holder (120) holding at least one lens (121); a suspension (130) for mounting said lens holder (120) on the support structure (100) to allow relative movement of the lens holder (120) and the support structure; and an actuator for moving said lens holder (120). The suspension (130) includes two link elements (133, 135) each connected at a first end to the support structure (100) by a pivotal connection and at the other, second end to the lens holder (120) by a pivotal connection, the pivotal connections allowing pivoting of the respective link element (133, 135) around a respective pivot axis, all the pivot axes being parallel, and the extent of the two link elements (133, 135) perpendicular to their respective pivot axes being parallel and of equal length.

ができた。 1977年 - 1978年 - 1978年